


## 4-Take-off rolls for foil and plate extrusion units

For manufacturing of plastic foils and plates



### Consisting of

- 2 pair of rollers with top and bottom rollers
- rollers with heat resistance and antistatic special surface conditioning
- top roller with selectable pneumatic pressure unit
- bottom roller with attachable gear motor (frequency-controlled)
- aluminium bearer drum with chromated or cork coating
- safety fence removeable for cleaning

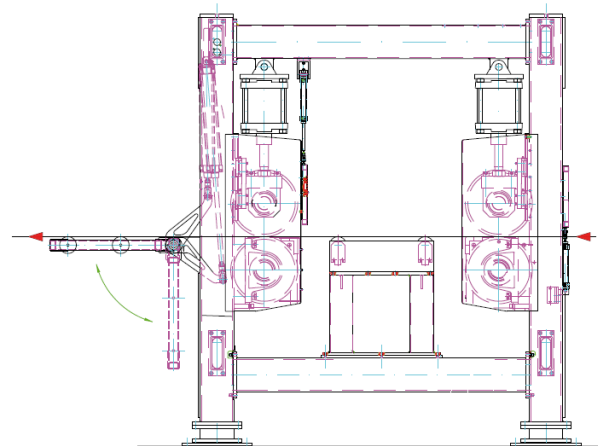

### Technical data

Working width	up to 3600 mm
Unit speed	up to 60 m/min
Controller	Frequency control
Voltage	Depending on the order